

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)


PCT

(10) International Publication Number
WO 2004/033376 A1

- (51) International Patent Classification⁷: C02F 1/32, 1/78, B01J 21/06
- (21) International Application Number: PCT/SE2003/001564
- (22) International Filing Date: 8 October 2003 (08.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0202978-3 9 October 2002 (09.10.2002) SE
0301604-5 3 June 2003 (03.06.2003) SE
- (71) Applicant (for all designated States except US): BENRAD AB [SE/SE]; P O Box 30112, S-104 25 STOCKHOLM (SE).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): BROLIN, Anders [SE/SE]; Pettersbergsvägen 15, S-129 40 HÄGERSTEN (SE). NYBERG, Kristoffer [SE/SE]; Gotlandsgatan 16B, S-116 38 STOCKHOLM (SE). LIAO, Haidong [CN/SE]; Erik Dahlbergsgatan 30, S-115 32 STOCKHOLM (SE).
- (74) Agent: DR LUDWIG BRANN PATENTBYRÅ AB; P O Box 17192, S-104 62 STOCKHOLM (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR LIQUID PURIFICATION

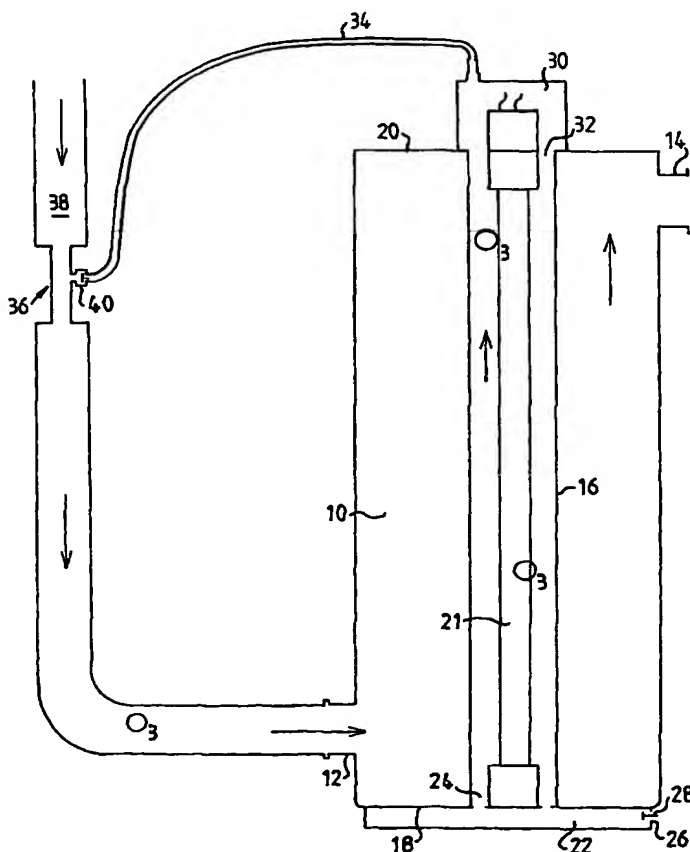

(57) Abstract: The present invention relates to a method for treating liquids, comprising the steps of irradiating a flow of air and a flow of the liquid to be treated at the same time in order to create ozone in both the air and the liquid, mixing the ozone-containing air with the liquid to be treated up-streams the liquid irradiating point, irradiating the flow of liquid containing the in-mixed ozone in order to break down the ozone in the liquid for producing free radicals.

WO 2004/033376 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

METHOD AND APPARATUS FOR LIQUID PURIFICATION

TECHNICAL AREA

The present invention relates to a system for purifying liquid, and in particular water, by oxidizing contaminants in the liquid.

BACKGROUND OF THE INVENTION

There is an ever increasing need for purifying liquids, and in particular water. There are a number of applications where water needs to be purified and decontaminated, and a few of these are swimming pools and recreational baths, green houses, animal farms, cooling towers, hospitals etc. The conventional technologies for purifying and decontaminating water for most applications include the use of chemicals that are mixed with the water. Due to environmental aspects and the impact that chemicals have on the environment, humans and animals, there is a strive to reduce the use of chemicals.

One approach to purify/decontaminate water has been to use ozone. Several methods have been developed in several countries for purifying water with ozone (O_3) in drinking water installations and bathing facilities, and also ozone dissolved in water for cleaning, disinfection and sterilization of articles. A combination of ozone, oxygen, hydrogen peroxide and UV radiation means that the reaction proceeds much more quickly and more efficiently by virtue of the generation of more free radicals.

The inactivation of microorganisms with the aid of ozone and radicals is considered as an oxidation reaction. The membrane of the micro-organism is the first to be attacked. Within the membrane/cell wall, the ozone and the radicals destroy nuclear material inside the cell/virus/spore. The inactivation reaction in the case of most micro-organisms occurs within minutes, depending on the ozone dose and the amount of free radicals which are formed.

Despite its solubility in cold water, ozone is broken down (=consumed) quickly, as is the case in air, which gives a great many different radicals and more or less stable by-products such as aldehydes, bromate and
5 carboxylic acids. The degree of breaking down depends on the pH, the substance which is exposed and the temperature. Certain substances are broken down easily by the ozone. However, the majority of substances and molecules are oxidized more efficiently by free radicals which are formed by ozone and the media treated by ozone.

10

One very efficient method of using free radicals in the oxidizing process is disclosed in the international patent application No. WO 96/20017. The method utilises UV-radiation to create ozone in air and liquid, radiates the ozone with certain wave-lengths in order to obtain free
15 radicals, which oxidize the contaminants in the air or liquid. In order to increase the production of free radicals, catalysts are used, for example titanium oxides. The applicant of the above patent application has obtained very good results in purifying/decontaminating water in cooling towers, swimming pools, green houses, to name a few
20 applications. The use of the patented method has enabled a complete removal of chemicals in those applications.

However, for certain applications, the device for purifying water or other liquids described in WO 96/20017 has capacity limitations as regards
25 the amount to be treated per time period. Trials have been made to reduce the flow past the UV-radiation sources, to use the device also during periods when no consumption of water is taking place and to store the purified water in intermediate tanks. This has the drawback that additional space has to be available in order to accommodate the
30 intermediate tanks. For some applications this might not be feasible and for some applications and large consumers it is not an optimal solution. There has also been a need from customers to be able to arrange the device so that minimal floor space is occupied.

Another application with specific problems is found in water systems in building. This is in connection with legionella bacteria, a water-based organism which causes infection when inhaled in an aerosol form, which is a huge problem all over the world, and is especially

5 troublesome in hospitals, if already weak and sick people receive the bacteria via for example showers. If the tap-water is not hot enough the bacteria may thrive and multiply uncontrolled. The main solution to this problem has been to increase and to try to control the temperature of the water in order to prevent the occurrence of legionella bacteria.

10 Chemicals that are able to kill these bacteria cannot usually be used for these applications since they may be harmful also to humans.

For certain applications, the above mentioned method has some shortcomings. If the liquid is heavily contaminated, the amount of ozone

15 might not be sufficient to generate the amount of radicals needed for a complete removal of contaminants in the liquid. This may be due to that the radiating energy for creating ozone in the liquid either is absorbed or blocked by the contaminants or other particles/matter in the liquid. In for example treatment of salt water a lot of energy is absorbed by

20 halogens. Thereby not enough ozone is created and thus not enough radicals for the purification process. There might also be the case that the amount of oxygen for creating ozone is insufficient.

In view of the above it would therefore be advantageous to increase the

25 ozone content in a simple and economical way using the radicals as the primary purification oxidants. Regarding the application treating salt or brackish water it would be advantageous to use a continuous system.

There is thus a need for improvements in this technical area.

30

BRIEF DESCRIPTION OF THE INVENTION

The invention aims at solving the above mentioned problems with a system according to the characterising part of claim 1 and 5. Preferable embodiments of the invention are covered by the dependent claims.

5

According to a main aspect of the invention it is characterised by a method for treating liquids, comprising the steps of irradiating a flow of air and a flow of the liquid to be treated at the same time in order to create ozone in both the air and the liquid, mixing the ozone-containing air with the liquid to be treated up-streams the liquid irradiating point, irradiating the flow of liquid containing the in-mixed ozone in order to break down the ozone in the liquid for producing free radicals.

According to another aspect of the invention it is characterised in exposing the fluid to at least one catalyst at the same time as the ozone is broken down for increasing the amount of free radicals.

According to a further aspect of the invention, it is characterised in that the mixing is obtained by an ejector effect into the flow of liquid.

20

The advantages with the present invention are several. By irradiating air and liquid at the same time with the same UV radiating light source ozone is created both in the air and in the liquid, thereby avoiding separate ozone generating sources. The ozone containing air is then fed to the flow of liquid up-streams the irradiating point, whereby among other constituents the ozone is mixed with the liquid to be treated. In this way the ozone in the liquid starts to react with the contaminants to a certain extent. The ozone-containing liquid is then irradiated whereby the ozone created in the liquid and the ozone mixed with the liquid is broken down to form a large amount of free radicals, which perform the main purifying/treating action. In total larger quantities of ozone can be generated/contained in the liquid than if the liquid was only irradiated by the UV light generating means. This is especially true if one

25
30

compares the oxygen content between for example water and air in that air contains drastically larger quantities of oxygen than water. Yet the increase of ozone is performed in a simple and effective way without using additional ozone generating means or pre-treatment containers.

- 5 Because ozone is added, the previous mentioned problem with radiation energy being absorbed/blocked leading to insufficient production of ozone is thereby eliminated. The generating process is simultaneous in that ozone is created by the UV light generating means in both the air surrounding the UV light generating means and in the liquid in the
- 10 container at the same time as the ozone in the container is broken down to produce radicals.

- In order to further increase the amount of radicals, the treatment point, for example a container where the liquid is irradiated, is arranged with
- 15 catalysts capable of increasing the amount of radicals. The catalysts can consist of titanium dioxide and may be arranged on the inner surface of the container. According to one embodiment the container might be manufactured from titanium, or at least lined with titanium, which is treated in a suitable way to create titanium dioxide. A very
- 20 large catalytic surface is thus created in a simple and efficient way. Furthermore, the titanium has the advantage to withstand the very corrosive environment inside the container.

- The mixing is preferably performed by using a throttle or the like
- 25 decrease of the inlet section, like for example a Venturi pipe, which is capable of creating a negative pressure, thus creating an ejector effect. No special arrangements or components are thus required for mixing the ozone with the liquid. The amount of the ozone to be mixed can readily be regulated by controlling the air flow passing the UV -light
- 30 generating means.

According to a further aspect of the invention it is directed to a system for treating liquids, and in particular water, including through-flowing

means provided with inlets and outlets for the liquid, UV-light generating means arranged in the through-flowing means, capable of generating ozone in the through-flowing liquid and at the same time break down the ozone in order to produce free radicals, characterised in
5 that mountable and demountable connection means are arranged to the inlet and outlet of the through-flowing means.

According to yet another aspect of the invention the system is characterised in that it is arranged with at least two through-flowing
10 means and that preferably that each through-flowing means is designed as an elongated pipe.

According to yet an aspect of the invention, the UV-light generating means is arranged in one end of the elongated pipe and that ceramics is
15 arranged on the inside of the through-flowing means at least adjacent said UV-generating means.

According to a preferred embodiment of the invention at least two of the said through flowing means are arranged in series, whereby the first
20 through-flowing means is connected to an inlet pipe for liquid to be treated and that the last through-flowing means is connected to an outlet pipe for the treated liquid and/or are connected in parallel to an inlet pipe for liquid to be treated and an outlet pipe for the treated liquid.

25 According to a further aspect of the invention the through-flowing means is arranged adjacent a water outlet for human use like for example a shower head.

30 The advantages with the present invention are several. By arranging the through-flowing means with mountable and dismountable means it is very easy and convenient to vary the through-put through the system depending on the capacity requirements. One or several through-flowing

means with UV-radiating lamps can be placed after each other, ie. in series, either directly or via bends, which enables the system to be adapted to the space available without for example taking up too much floor space. For a substantial increase of the system one or more
5 through-flowing means may be arranged in parallel with a first inlet/outlet connected to an inlet pipe and the second inlet/outlet connected to an outlet pipe.

By using the components of the system in series and/or in parallel the
10 through-put may be varied almost infinitely. Several parallel arrangements of the system may be arranged in series in order to treat heavily contaminated water several times. The system is also based on standard components and fittings and reduces the need of special components in that standard lengths of through-flowing means with
15 lamps can be combined with standard bends and connections to the water supply that is to be treated.

When placing a through-flowing means in connection to the outlet for a shower, one obtains the special advantage of taking care of the risk of
20 being infected with legionella bacteria. Because of the pronounced risk of legionella in large tap water systems and the difficulties of exterminating them in such systems, the present invention removes the risk of any such bacteria leaving the water system. This is a clear advantage over the present solutions thereby completely eliminating the
25 problem without any chemicals and without any risk for the users of water in these systems.

These and other aspects of, and advantages with, the present invention will become apparent from the following detailed description of the
30 invention and from the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the follow detailed description of the invention reference will be made to the drawings, of which

5 Fig. 1 is a schematic side view of a first embodiment of the present invention,

Fig. 2 is a schematic side view of a variant of the embodiment of Fig. 1,

10

Fig. 3 shows a central component, a through-flowing means, for treating contaminated liquid, comprised in a second aspect of the present invention,

15 Fig. 4 shows different components that may be included in the invention according to Fig. 3,

Fig. 5 shows one example of the use of the components of Fig. 3 to obtain the present invention,

20

Fig. 6 shows another example of the use of the components, and

Fig. 7 shows the installation of a decontaminating unit in connection with a shower head.

25

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows one embodiment of the present invention. It comprises a treatment container 10 having an inlet 12 and an outlet 14 connectable to a transport system for the liquid to be treated. Substantially the whole inner surface is arranged with titanium, either in that the compartment is made of titanium or that the inner surface is arranged with a layer of titanium, which is treated to obtain titanium dioxide for increasing the amount of free radicals produced by the UV radiation.

30

The treatment to obtain titanium dioxide may for example be done by etching the titanium pipe or the layer. The titanium also has the advantage that it is very resistant to the corrosive environment inside the container.

5

A tube 16 made of quartz glass extends through the interior of the container between two opposite walls 18, 20. Inside the quartz tube a UV radiating light source 21 is arranged, which extends between the opposite walls of the compartment. The light source is connected to a
10 suitable power supply.

At one end of the quartz tube a compartment 22 is arranged, having passages 24 communicating with the interior of the quartz tube. The compartment also is provided with an air intake passage 26, which
15 passage is arranged with a one-way valve 28 admitting only air onto the compartment. Around the opposite end of the quartz tube a second compartment 30 is arranged. It also is arranged with passages 32 communicating with the interior of the quartz tube.

20 A conduit 34 is connected to the second compartment. The other end of the conduit is connected to a section 36 of the inflow conduit 38 via a one-way valve 40, which section 36 is arranged with a narrower cross-section like a Venturi tube in order to create a ejector effect around the connection of the conduit, as will be described below.

25

The device is intended to function as follows. The UV radiating light source is switched on, whereby it is chosen such that it emits wave lengths in the region of 180 – 400 nm, and in particular wavelength of 183.7 nm for converting oxygen in the medium to ozone molecules (O₃)
30 and 254 nm for decomposing the ozone molecules, as will be described.

Air enters the quartz tube through the one-way valve in the first compartment and surrounds the UV generating light source. The

irradiation causes the oxygen molecules to be converted to ozone. Since the air flows along almost the entire length of the UV generating light source it is exposed to radiation for a rather long period, ascertaining that a large quantity of ozone is created. At the same time some of the
5 ozone is broken down to free radicals by the radiation wave lengths that decompose the ozone to radicals.

The liquid to be treated is fed through the liquid inlet 12 and into the container 10 surrounding the quartz tube 16. Because of the flow
10 through the throttle section 36 of the flow conduit 38 of a Venturi-type, a negative pressure is created, whereby ozone from inside the quartz tube is drawn into the flow of liquid via the conduit 34 and the one-way valve 40. The liquid that thus enters the container is mixed with ozone.

15 Further, the irradiation of the liquid in the container will also create ozone by the UV light. Thus the liquid in the container contains both ozone that has been mixed in and ozone that has been created in the container by the irradiation. In the container the liquid is irradiated by the 254 nm wave length which causes the ozone in the liquid to
20 decompose and hydroxyl radicals to be formed. It is a simultaneous generating process in that the UV light generating means generates ozone in the air and in the liquid at the same time as it generates radicals in the liquid. The amount of radicals is further increased by the catalytic properties of the inner wall of the container by the titanium
25 dioxide.

By choosing the proper flow of air through the system the amount of ozone that is mixed with the liquid at the inflow can be regulated in correspondence with the capacity of the UV radiating light source so as
30 to minimize the amount of residual ozone, thereby preventing that ozone leaves the container via the outlet.

Fig. 2 shows a variant of the device of Fig. 1 intended to be used with the modular system described in the Swedish patent application No. 0202987-3, which hereby is incorporated by reference. In this application one section of the device according to Fig. 2 can then
5 replace two inter-connected sections according to 0202987-3. The device according to Fig. 2 can otherwise be connected in many different ways and connected with other parts, both in series and in parallel.

The invention according to the second aspect of the invention shown in
10 Figs. 3-7 utilises UV lamps emitting light within specific spectra. The liquid to be treated is exposed to UV radiation with a spectral distribution within the range of 180 - 400 nm. The wavelength of 183.7 nm in particular converts the oxygen in the medium to ozone molecules (O_3). The ozone molecules formed are at the same time decomposed by
15 radiation within the abovementioned wavelength range, especially at a wavelength of 254 nm. At the same time, the O_3 formed is broken down to form atomic oxygen. In order to increase the efficiency during generation of free radicals, in particular OH^\cdot radicals, oxides are added as catalysts.

20

The present invention utilises the principle of using free radicals for purifying liquid, and in particular water. The system consists of at least one substantially straight pipe, 110, Fig. 3. The pipe is made of preferably titanium or some other material lined with titanium on the
25 inside. The titanium on the inside of the pipe is treated to obtain a ceramic titanium oxide. The titanium oxide acts as a catalyst during the forming of free radicals, ie. the titanium oxide increases the amount of free radicals produced per time period. In one variant, a plastic pipe has been used, lined with titanium oxide. It is of course possible to utilize
30 other highly resistant materials and to use catalysts as described in WO 96/20017 but experience has shown that the use of titanium pipes or pipes lined with titanium have provided excellent resistance against the

very corrosive environment that the purification/decontamination results in.

5 In the embodiment shown in Fig. 3 one end of the pipe is provided with an end wall 112. A passage 114 is arranged in the end wall and an UV radiating light source 116 is arranged in the passage with a surrounding housing 18 extending into the passage 114, providing UV radiation with wave lengths of 185 and 254 nm. These wave lengths have excellent properties in generating ozone in the water and then at
10 the same time breaking down the ozone to free radicals. The housing is preferably provided with light emitting wall part 120 for the convenience of the user in displaying if the lamp is working or not. Previously a watching hole was arranged in the pipe, which was prone to be blocked by sediment and also to leakage. A drive unit for the UV lamps is also
15 provided, not shown. A control unit for controlling one or several of the drive units is also provided, not shown. The design and function of the drive units and the control unit is mere routine work for the man skilled in the art and will not be described in more detail.

20 A first inlet/outlet 122 is arranged on the pipe wall adjacent the end wall, which inlet is arranged with suitable flanges 124 or other suitable connection means for connection to other piping. The inside of the pipe is treated to obtain titanium oxide for increasing the amount of free radicals produced by the UV radiation. The treatment to obtain
25 titanium oxide may for example be done by etching the titanium pipe or the layer. The end of the pipe opposite the UV lamp is arranged as the second inlet/outlet 126, provided with suitable flanges 128 or other connecting means for connection to other piping.

30 As shown in Fig. 4 the system comprises pipe bends 130, for example 90° or 180° but of course other angles are possible. Also these parts, even though not provided with any UV-radiation means, are preferably made of titanium or lined with titanium. Fig 4 also shows a few

connection alternatives for combining the components of the system, like connecting two straight pipes by inter-connecting their second inlets/outlets either directly like in 132, via a 90° bend like in 134 or via a 180° bend like in 136.

5

Fig 5 and 6 show a "parallel-connected" system where two straight pipe sections 132, 134, 136 provided with UV lamps are inter-connected with their second inlets/outlets to each other, so in fact there is a "back-flow" in one of the pipes. Several of these inter-connected pipes are placed in parallel where the first inlets/outlets 122 of one of the inter-connected pipes are connected to a common inlet pipe 140 and where the first inlets/outlets of the other inter-connected pipes are connected to a common outlet pipe 142. In this case the water to be treated is fed via the inlet pipe 140, where the opposite end of the inlet pipe is closed by a wall 144, and in parallel through the inter-connected pipes 132 where the water is irradiated by the UV-lamps of both pipes. The water is then fed through the water outlet pipe 142. In the same manner the end of the outlet is closed by a wall 144.

20 The configuration enables both an increased capacity in that a large number of pipes including UV-radiating means can be connected depending on application and capacity requirements and also that walls and ceilings may be taken into use for setting up the system. In other words, very little floor space has to be utilized, which may be of importance for applications where space is limited. With the components it is further easy to adapt the system to existing layout of the space to be used, rather than to rebuild the space in order to fit the purifying system.

30 Fig. 6 shows another example where three parallel-connected units have been connected to main inlet and outlet pipes, where the units have been placed on the walls and ceilings and also around corners. The system is thus very versatile. It is to be understood that other

designs of the components of the pipe system may be used without departing from the scope of the invention.

In this context it is also to be understood that lamps with different
5 power may be used and that additional oxygen may be added by appropriate means in order to increase the amount of ozone and thus of free radicals. When the water is heavily contaminated, or when large amounts of free radicals in the water is needed, it is also conceivable to include an ultrasonic device placed in the vicinity of the UV-lamps. High
10 amplitude ultrasonic waves generate free radicals and break contaminants.

One specific application where the system of the present invention may be utilized is for preventing legionella bacteria in connection with
15 showers, which is a potential infection point because the bacteria may cause infection when inhaled in an aerosol form. In the embodiment shown in Fig. 7 a pipe 170 including an UV-lamp as described above is connected to the outlet of a water faucet 172 in a shower or similar water outlet. The water from the faucet is led through the pipe where it
20 is irradiated by the UV-lamp whereby ozone is created, and whereby at the same time the ozone is broken down into free radicals, which react with and destroys the legionella bacteria. The number of free radicals is increased by the titanium oxide on the inside of the pipe. In this context it is to be pointed out that the life span of the free radicals is
25 extremely short and there is thus no risk whatsoever that free radicals can exit through the shower head 174. The inclusion of a disinfecting system according to the invention completely removes the risk of legionella bacteria to be spread to humans. It is also to be noted that in contrast to most devices using UV-light sources, where the light is
30 switched off during non-use due to eg. energy consumption, the present device is switched on all the time in order to ensure that no legionella bacteria can pass the device and settle beyond the it. This is feasible

due to the very low energy consumption needed for this particular application.

5 As an alternative, the pipe 176 may of course be connected to the inlet of the warm water 178 to the faucet 170, ie. before but in connection with, the faucet.

10 It is to be understood that the embodiments described above and shown in the drawings are to be regarded as non-limiting examples of the invention and that the scope of protection of the invention is defined by the patent claims.

PATENT CLAIMS

1. Method for treating liquids, comprising the steps of
 - irradiating a flow of air and a flow of the liquid to be treated at the same time in order to create ozone in both the air and the liquid,
 - mixing the ozone-containing air with the liquid to be treated upstreams the liquid irradiating point,
 - irradiating the flow of liquid containing the in-mixed ozone in order to break down the ozone in the liquid for producing free radicals.
2. Method according to claim 1, comprising the further step of exposing the fluid to at least one catalyst at the same time as the ozone is broken down for increasing the amount of free radicals.
3. Method according to claim 1 or 2, wherein the UV radiation which is emitted for breaking down the ozone and contaminants has a wavelength of 245 nm - 400 nm.
4. Method according to Claim 3, wherein the UV radiation which is emitted for breaking down the ozone has a wavelength of 254 nm.
5. Method according to any of the preceding claims, wherein the mixing is obtained by an ejector effect into the flow of liquid.
6. Apparatus for treatment of liquid according to claim 1, comprising a container having an inlet and an outlet for the liquid to be treated, UV generating light source capable of irradiating the inside of the container, air guidance means arranged inside the container, connected to an air source and an inlet conduit for the liquid to be treated via a mixing means.

7. Apparatus according to claim 6, wherein said air guidance means comprises a compartment divided from the inside of the container by a quartz glass and that said UV light radiating means is arranged in or adjacent said compartment.
- 5
8. Apparatus according to claim 6, wherein substantially the whole of the inner surface is arranged with a catalyst.
9. Apparatus according to claim 8, wherein the catalyst comprises titanium dioxide.
- 10
10. Apparatus according to any of the preceding claims 6-9, wherein the mixing means comprises a throttle on the inlet, which throttle is capable of creating an ejector effect of the air/ozone into the flow of liquid.
- 15
11. Apparatus for treating liquids, and in particular water, according to claim 6, further including through-flowing means provided with inlets and outlets for the liquid, UV-light generating means arranged in the through-flowing means, capable of generating ozone in the through-flowing liquid and at the same time break down the ozone in order to produce free radicals, characterised in that mountable and demountable connection means are arranged to the inlet and outlet of the through-flowing means.
- 20
- 25
12. System according to claim 11, characterised in that it is arranged with at least two through-flowing means.
13. System according to claim 12, characterised in that said through-flowing means are arranged in series, whereby the first through-flowing means is connected to an inlet pipe for liquid to
- 30

be treated and that the last through-flowing means is connected to an outlet pipe for the treated liquid.

- 5 14. System according to any of the claims 12-13, characterised in that at least two of the said through flowing means are connected in parallel to an inlet pipe for liquid to be treated and an outlet pipe for the treated liquid.
- 10 15. System according to any of the preceding claims 11-14, characterised in that the through-flowing means is designed as an elongated pipe.
- 15 16. System according to claim 15, characterised in that the UV-light generating means is arranged in one end of the elongated pipe.
- 20 17. System according to any of the preceding claims 11-16, characterised in that ceramics is arranged on the inside of the through-flowing means at least adjacent said UV-generating means.
- 25 18. System according to claim 17, characterised that the ceramics is titanium oxides.
19. System according to any of the claims 11, 15-18, characterised in that the through-flowing means is arranged adjacent a water outlet for human use, like a shower head.
- 30 20. System according to claim 19, characterised in that the through-flowing means is arranged between a water faucet and the water outlet.

21. System according to claim 19, characterised in that the through-flowing means is arranged between a warm water pipe and a faucet connected to the water outlet.

1 / 7



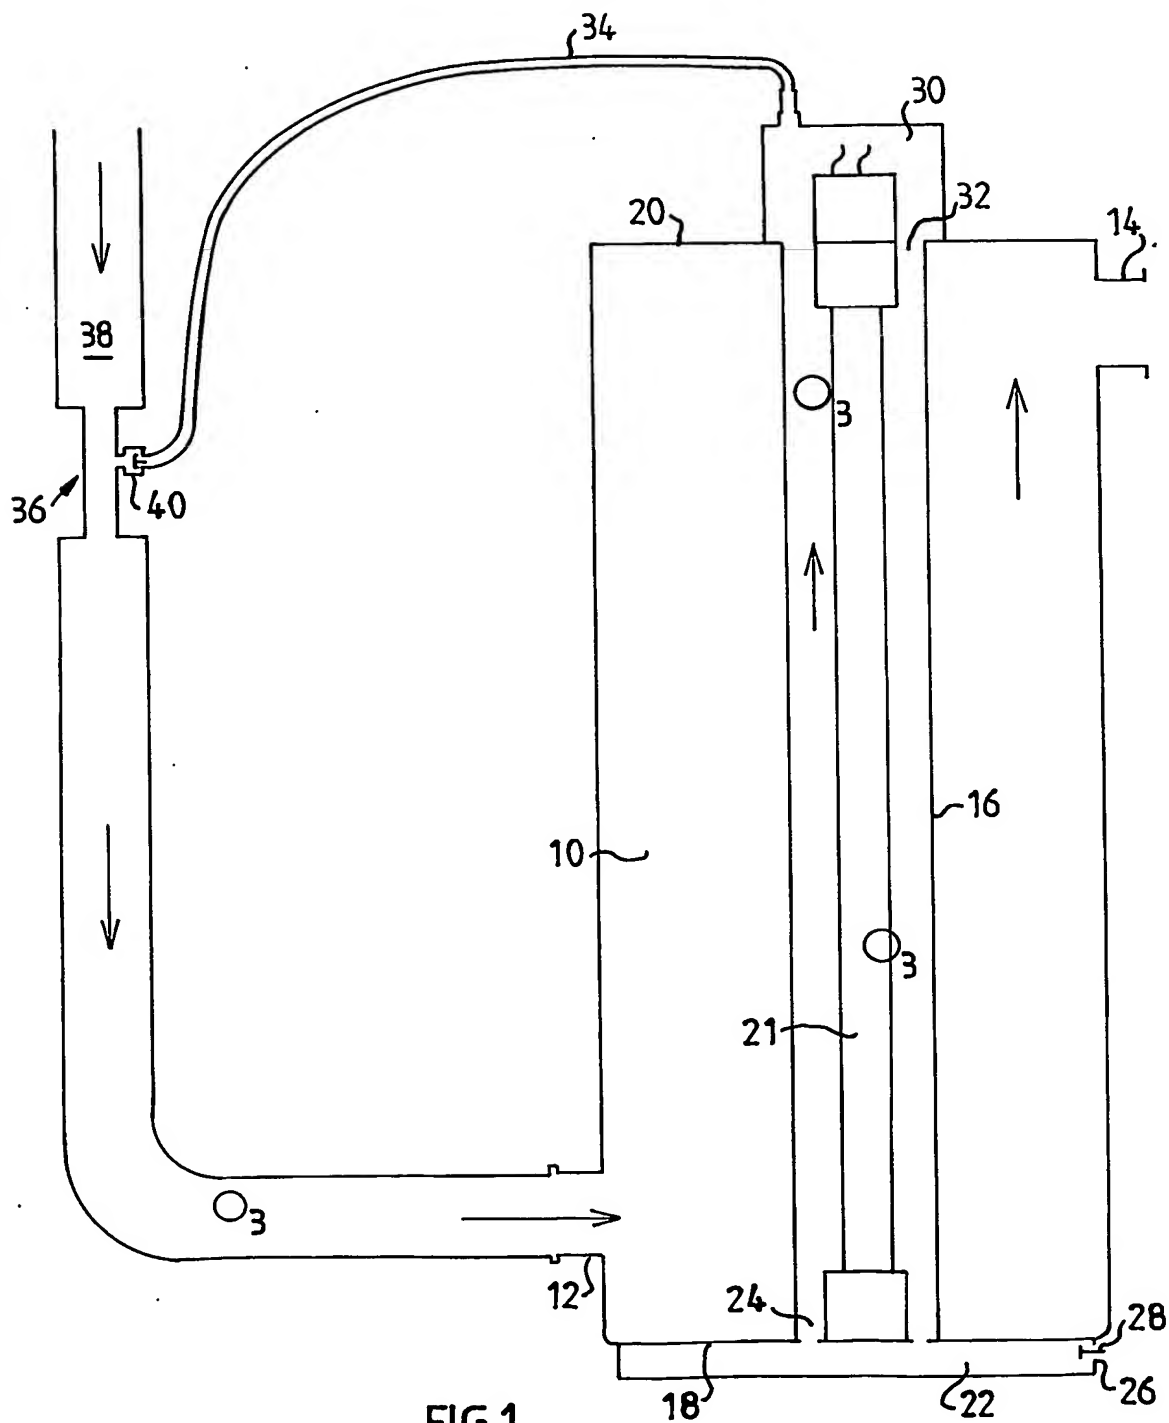


FIG.1

217

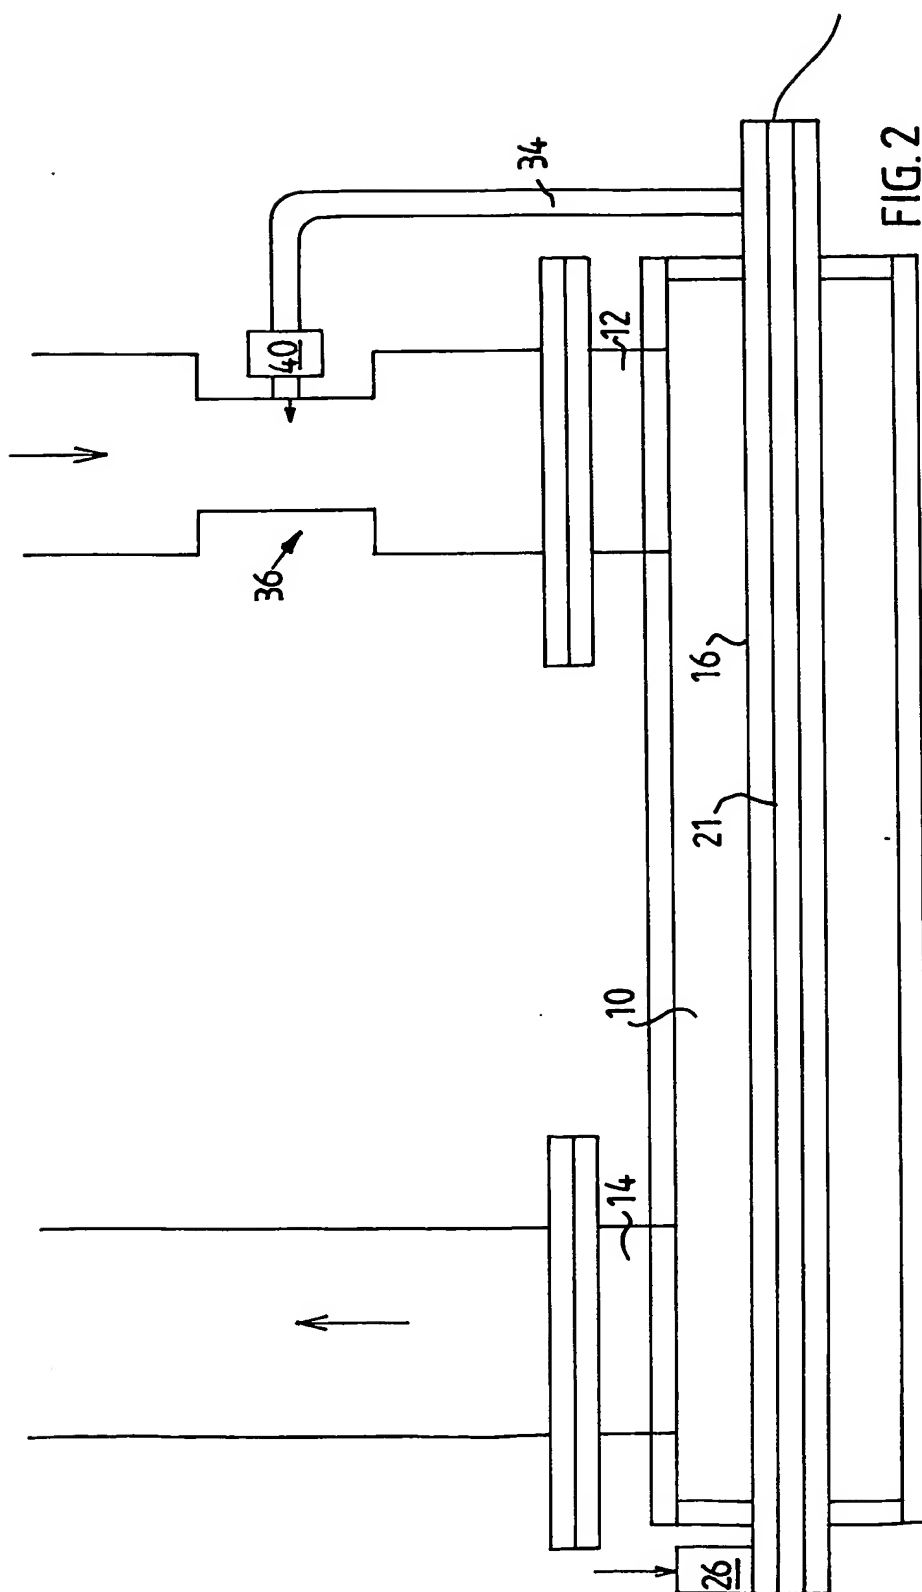

3 / 7

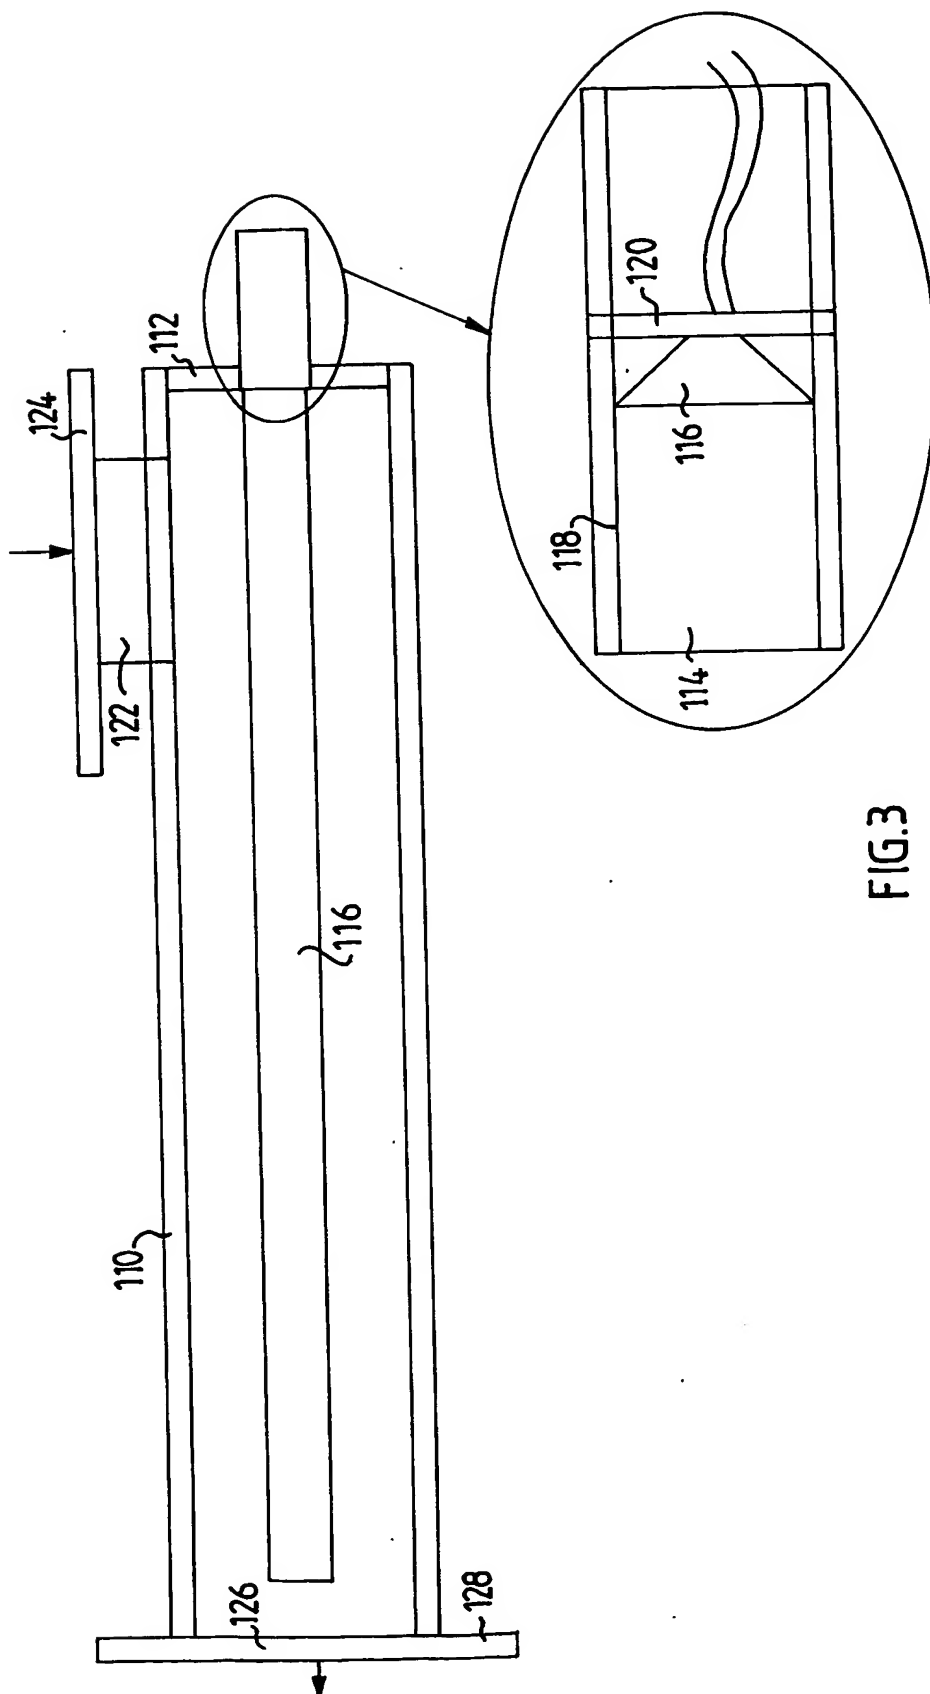

4 / 7

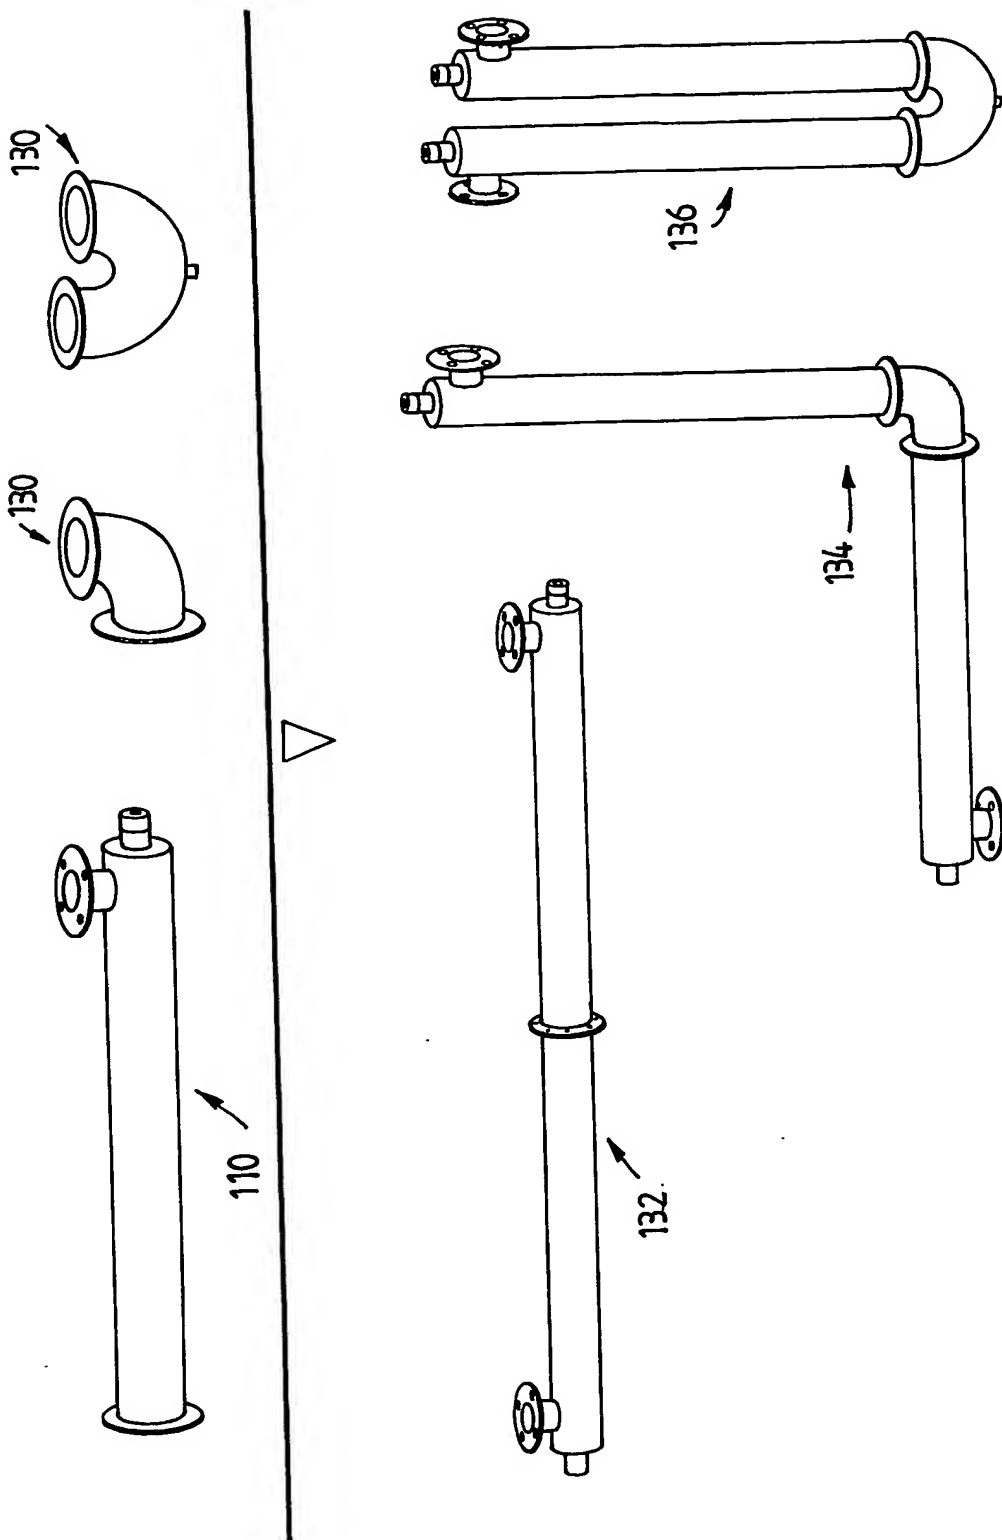


FIG. 4

5 / 7

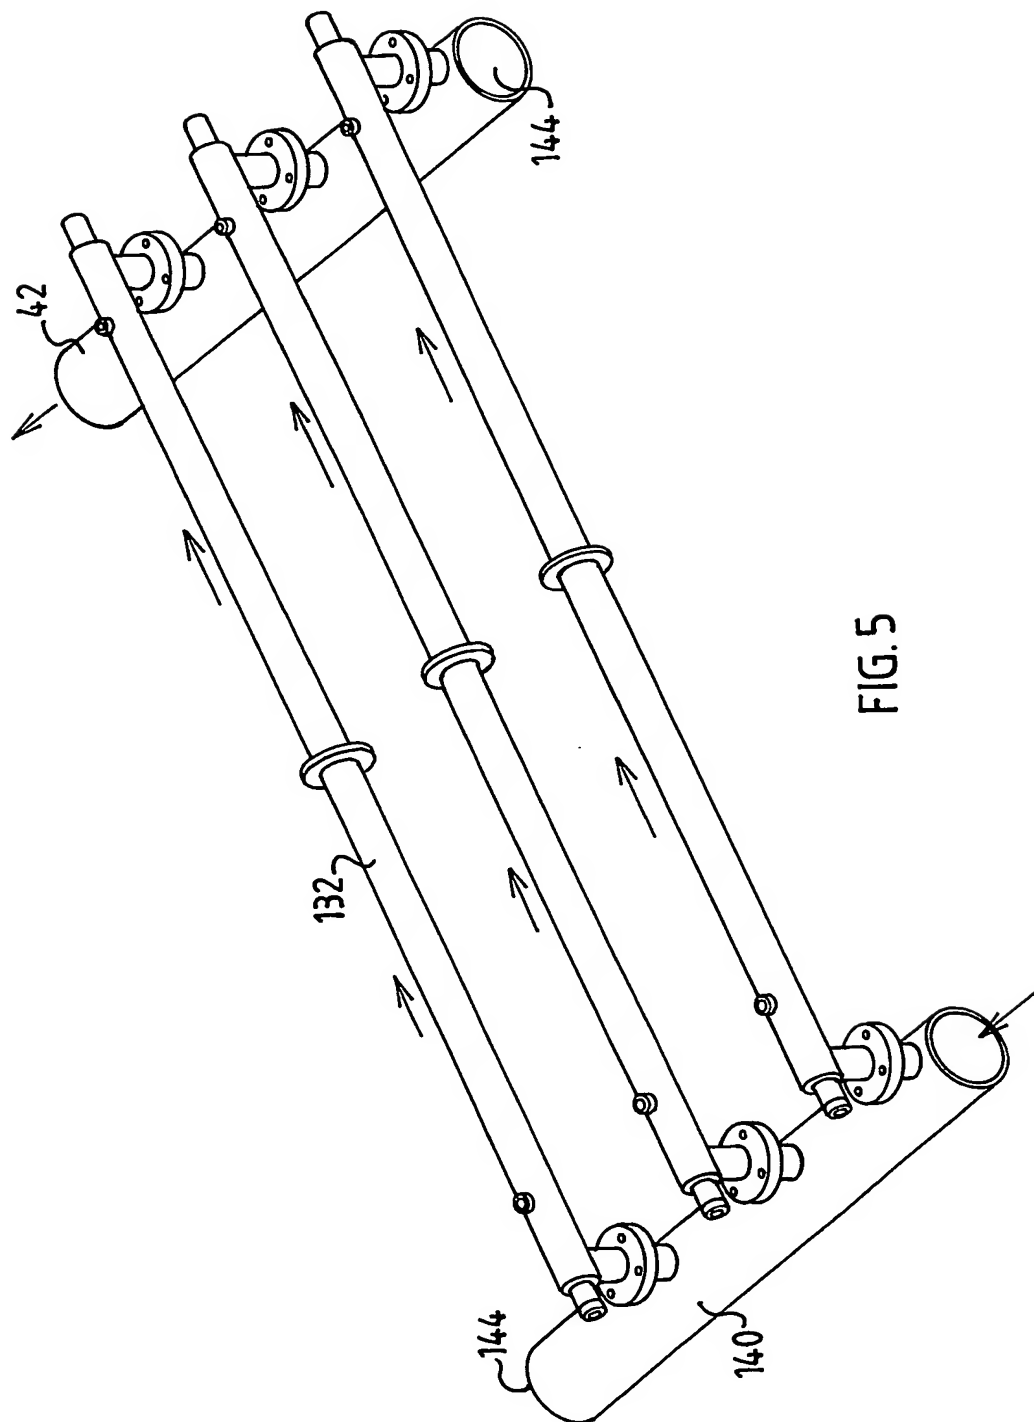


FIG. 5

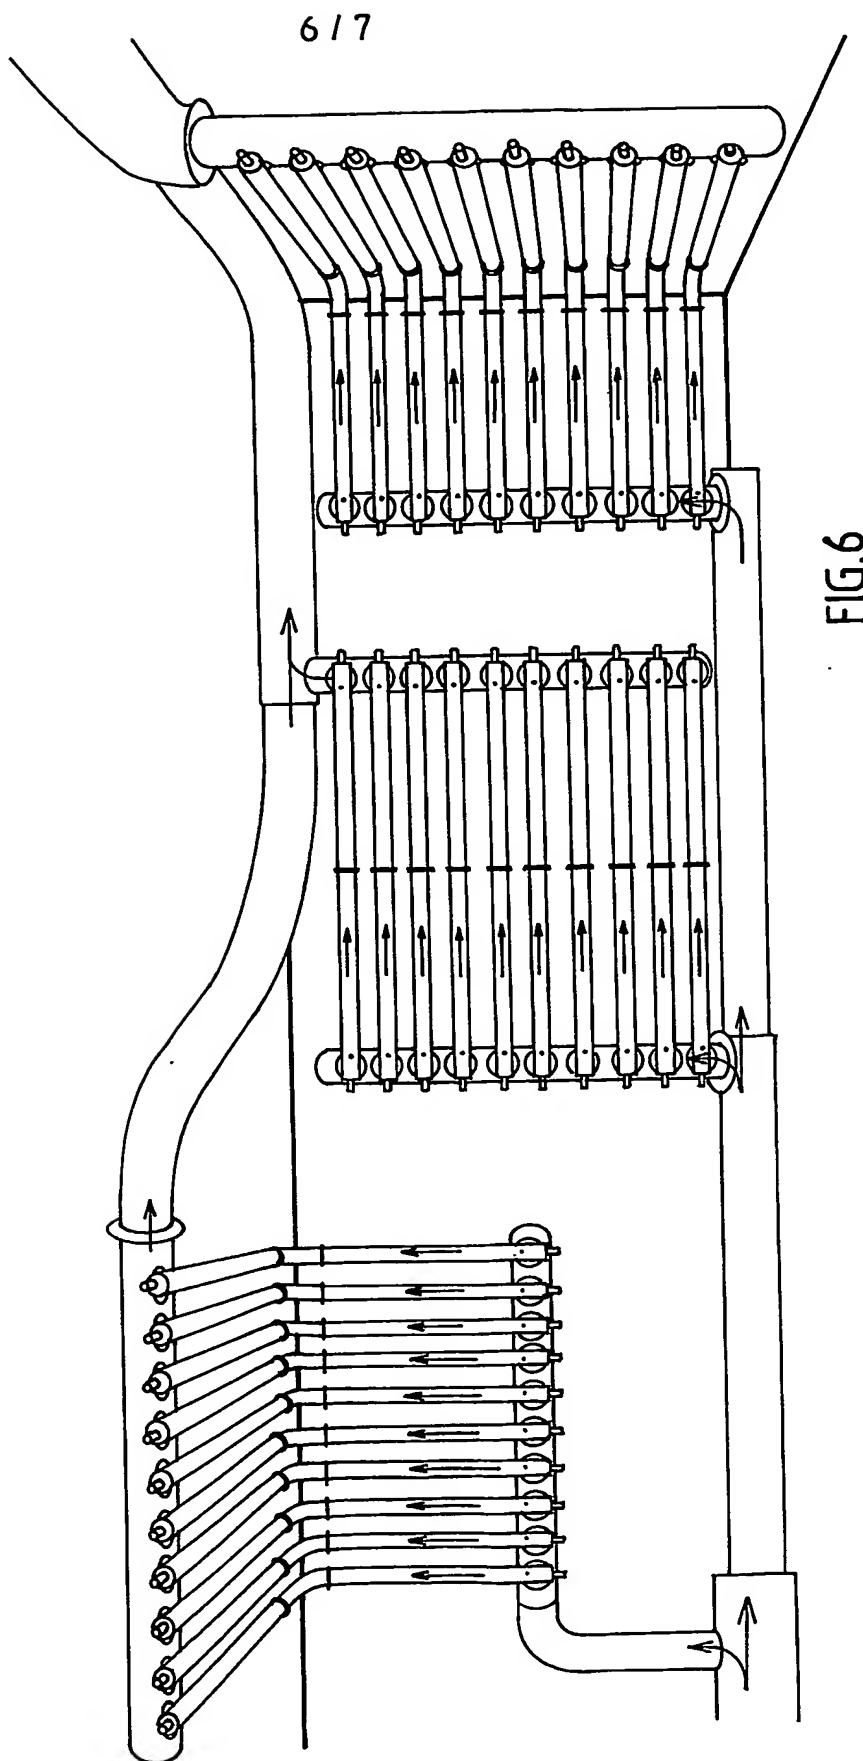


FIG. 6

7/17

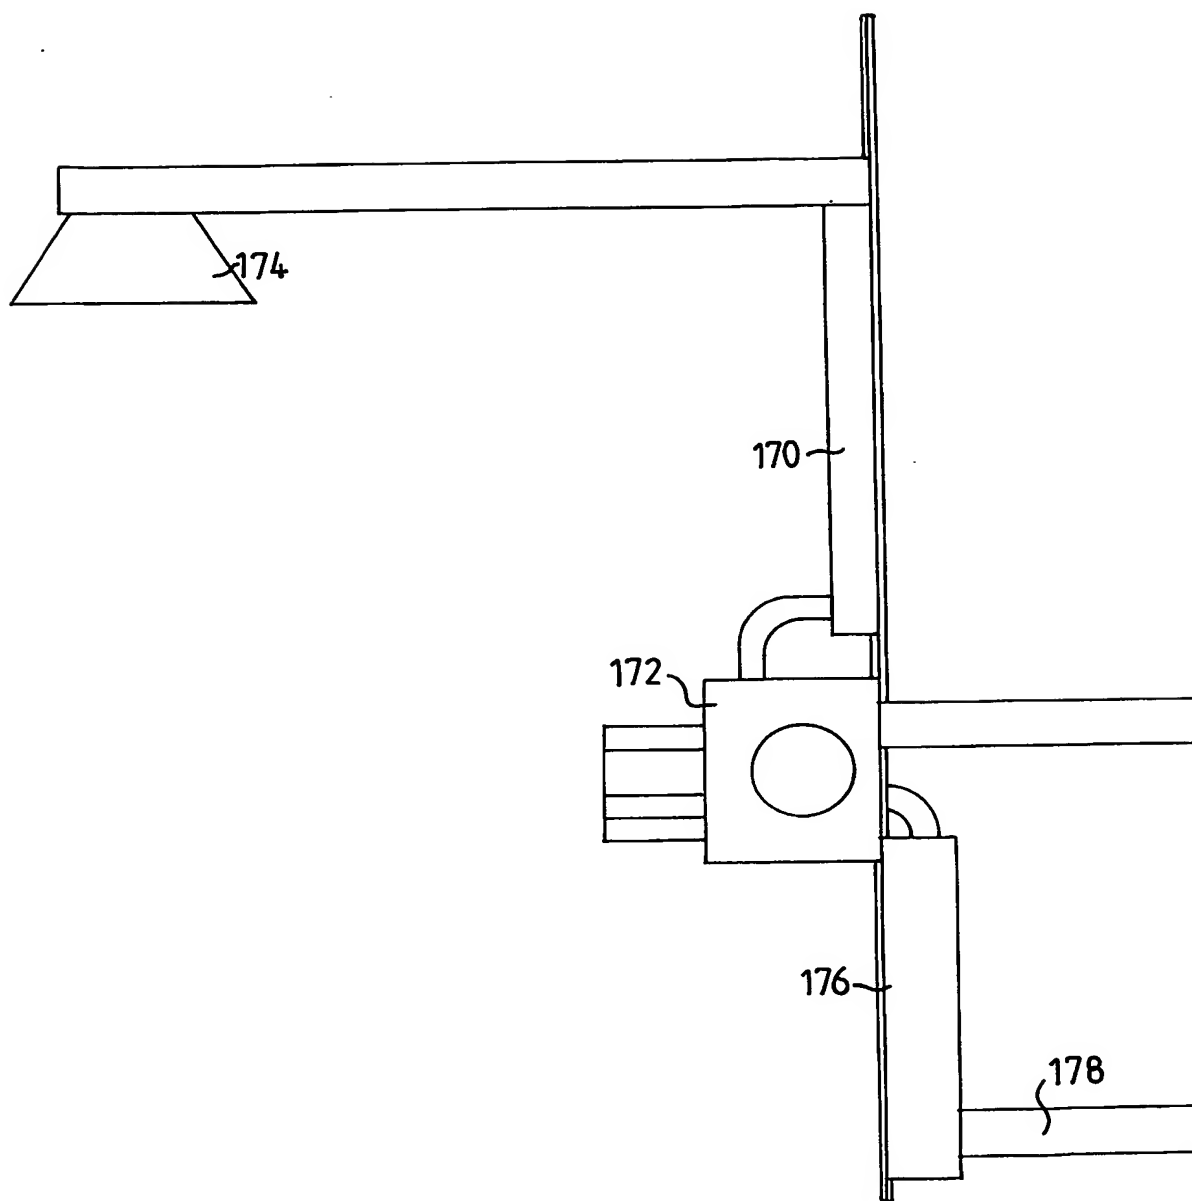


FIG.7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01564

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: C02F 1/32, C02F 1/78, B01J 21/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI DATA, EPO-INTERNAL, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4230571 A (ROBERT C. DADD), 28 October 1980 (28.10.80), column 2, line 16 - line 24; column 2, line 42 - line 45; column 3, line 40 - column 6, line 3, figure 1	1,3-5,6-7,10
Y	--	2,8-9
X	US 4141830 A (ANTHONY J. LAST), 27 February 1979 (27.02.79), column 2, line 43 - column 3, line 62, figure 2	1,3-5,6-7,10
Y	--	2,8-9,11-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 December 2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

09-01-2004

Authorized officer

Jens Waltin/ELY

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01564

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9501307 A1 (UVOX HOLDINGS PTY. LTD.), 12 January 1995 (12.01.95), page 10, line 25 - page 13, line 29; page 15, line 8 - line 19; page 6, line 14 - line 17, figures 2-4	1,3-5,6-7,10
Y	--	2,8-9,11-21
X	US 4273660 A (STUART W. BEITZEL), 16 June 1981 (16.06.81), column 3, line 7 - column 4, line 68	1,3-5,6-7,10
Y	--	2,8-9
Y	US 20020043504 A1 (JIAN CHEN ET AL), 18 April 2002 (18.04.02), sections (0001)-(0005),(0008),(0024), figures 1-6	11-21
Y	--	11-21
Y	US 20010050218 A1 (ALI TABATABAIE-RAISSI ET AL), 13 December 2001 (13.12.01), sections (0001)-(0002),(0165)-(0170),(0018)-(0019), (0314)-(0319), examples 20,21, figures 19a,19c,21a, 21b	11-21
Y	--	19-21
Y	US 5843309 A (PHILIP W. MANCIL), 1 December 1998 (01.12.98), column 2, line 27 - line 35; column 5, line 35 - line 44, figures 2,5	19-21
Y	--	2,8-9,17-18
Y	WO 9620017 A1 (SÖREMARK, RUNE), 4 July 1996 (04.07.96), page 6, line 17 - page 7, line 32; page 10, line 5 - line 6	2,8-9,17-18
	-- -----	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE03/01564

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE03/01564

The subject matter of independent claim 1 has been found to lack novelty in view of W095/01307 and inventive step with respect to US4230571 among others and the subject matter of claim 6 lacks novelty in view of US4230571 among others.

Since the invention according to the independent claims lacks novelty/inventive step, the dependent claims relate to several inventions, as follows:

- A: claims 2 and 8-9 relate to the use of a catalyst
- B: claims 3-4 relate to the wavelengths of the UV radiation
- C: claims 5 and 10 relate to mixing using an ejector
- D: claim 7 relates to a quartz tube surrounding the UV-lamp
- E: claims 11-21 relates to a modular configuration of several treatment units

Further, since claim 11 is considered to lack an inventive step with respect to US4141830 in combination with US2002/0043504, the subject matter of claims 12-21 also falls apart into several inventions:

- F: claims 12-16
- G: claims 17-18
- H: claims 19-21.

INTERNATIONAL SEARCH REPORT
Information on patent family members

31/10/03

International application No.

PCT/SE 03/01564

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	4230571	A	28/10/80	NONE		
US	4141830	A	27/02/79	CA	1048733 A	20/02/79
WO	9501307	A1	12/01/95	AU	7064994 A	24/01/95
				CA	2193739 A	12/01/95
				CN	1130373 A	04/09/96
				EP	0708738 A	01/05/96
				ZA	9404772 A	22/02/95
US	4273660	A	16/06/81	US	4189363 A	19/02/80
US	20020043504	A1	18/04/02	NONE		
US	20010050218	A1	13/12/01	NONE		
US	5843309	A	01/12/98	US	6120691 A	19/09/00
WO	9620017	A1	04/07/96	AT	218894 T	15/06/02
				AU	698109 B	22/10/98
				AU	4361296 A	19/07/96
				DE	69527086 D,T	19/12/02
				DK	800407 T	07/10/02
				EP	0800407 A,B	15/10/97
				ES	2178681 T	01/01/03
				JP	10511572 T	10/11/98
				PL	178088 B	29/02/00
				PL	321430 A	08/12/97
				PT	800407 T	29/11/02
				SE	504204 C	09/12/96
				SE	9404555 A	29/06/96
				SI	800407 T	00/00/00
				US	5961920 A	05/10/99
				US	6358478 B	19/03/02